


## HTG 075-25

Fire resistant cabinet for explosives ((double leaf), type 90

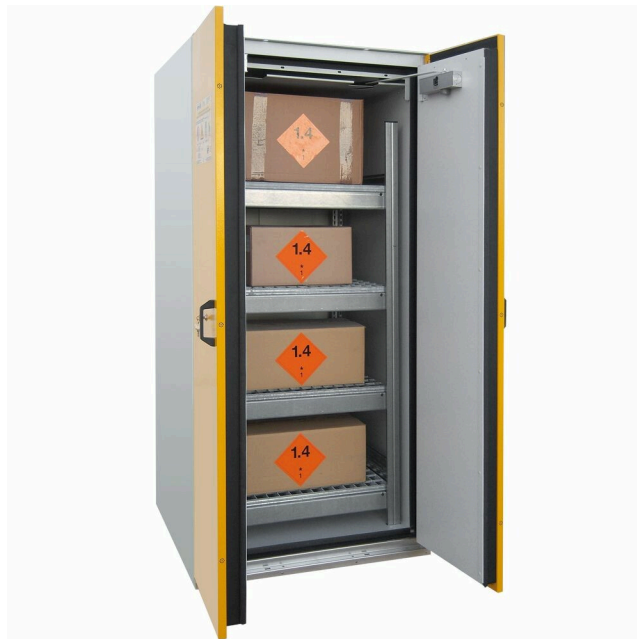

### Prime parameters

#### Size of the safe

External dimensions: 1935 mm × 900 mm × 900 mm

#### Colour

Choose your safe's standard colour or modify it

#### Key lock

Key lock

# Technical details

External dimensions (H x W x D)	1935 mm x 900 mm x 900 mm
Internal dimensions (H x W x D)	1580 mm x 797 mm x 735 mm
Weight	530 kg
Capacity	925
Standard lock	Key lock
Size of the safe	Big
Article number	HTG 075-25
Fire resistance	90 minutes acc. to EN 14470-1 type F90 + TRbF 20-L
Tank bottoms	4
Load capacity of shelves	75 kg
Door opening direction	both sides
Door opening angle	90°
Lacquer/Colour	light grey (similar to RAL 7035), door – daffodil yellow RAL 1007
Lock	cylindric
Features of the lock	reinforced locking system
More data on the body	insulation according to German standard DIN 4102, internal cabinet made of high-pressure laminate panels
More data on the door	double leaf, with a device to stop the door in the open position
Equipment	- 4 shelves adjustable in height every 25 mm, - approved for storage of airbag components and seat belt pretensioners of classes PT1 and PT2, - integrated earthing at the top of the cabinet, - enhanced corrosion resistance, - adjustable feet for easy leveling and alignment, - stainless steel skirting rail