


HTIV 445-02

Safe for valuables

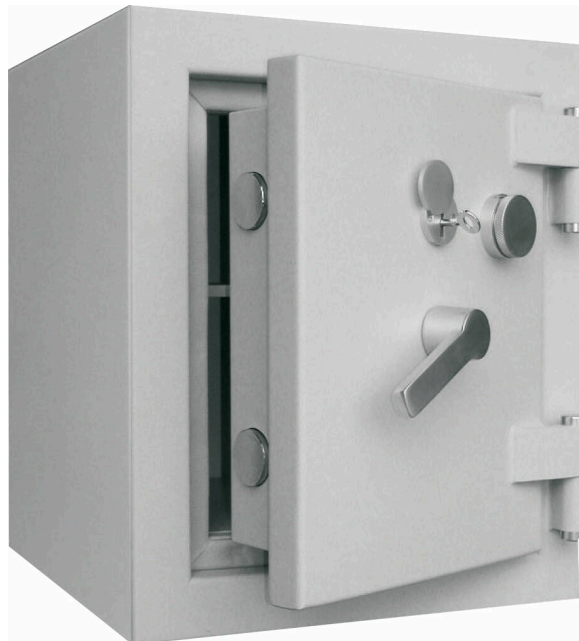

Prime parameters

Size of the safe

External dimensions: 845 mm × 500 mm × 506 mm

Resistance class and insurance

Security class IV according to EN 1143-1

Colour

Choose your safe's standard colour or modify it

Key lock

Key lock

Technical details

| | |
|-------------------------------------|--|
| External dimensions (H x W x D) | 845 mm x 500 mm x 506 mm |
| Internal dimensions (H x W x D) | 740 mm x 400 mm x 305 mm |
| Weight | 325 kg |
| Capacity | 90 l |
| Security class | IV |
| Limit of protected value – home | to 400.000 € |
| Limit of protected value – company | to 150.000 € |
| Standard lock | Key lock |
| Size of the safe | Medium |
| Article number | HTIV 445-02 |
| Adjustable shelves | 1 |
| Anti-burglary protection standard | EN 1143-1 |
| Certification body | VdS |
| Fire resistance | IBS-tested fire and smoke protection through Thermodur seals in the door leaf |
| Door opening direction | right side |
| Door opening angle | 90° |
| Door clearance dimensions | 655 x 320 mm |
| Protruding door hinges/fitings | 60 mm |
| Lacquer/Colour | light grey RAL 7035 |
| Lock | high security key lock (2 keys included) + mechanical combination lock |
| Adapted for anchoring in the ground | yes |
| Features of the lock | 3-sided bolt locking system with strong pins of 50 mm diameter |
| More data on the body | - lighter weight due to armouring: shell made of Siemens-Martin steel, filled with Hartsinter stones and bicomponent material, - Hartsinter hardness grade 9, melting point 2000 °C, - Nervoform protection system in the event of heat exposure, - protection against bursting and cutting with a torch |
| Adapted for wall anchoring | no |
| Equipment | preparation for connection of an alarm system |