
# HTS 115-01

**Wall-mounted key safe**

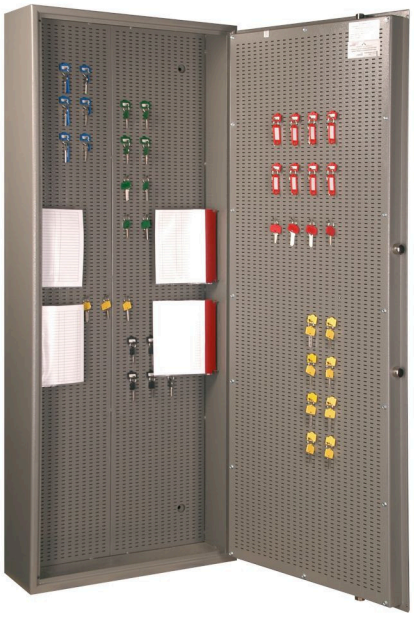

## Prime parameters

### Size of the safe

External dimensions: 350 mm × 350 mm × 200 mm

### Resistance class and insurance

Security class S1 according to EN 14450

### Colour

Choose your safe's standard colour or modify it

# Technical details

| | |
|---|---|
| External dimensions (H x W x D) | 350 mm × 350 mm × 200 mm |
| Internal dimensions (H x W x D) | 344 mm × 344 mm × 123 mm |
| Weight | 20 kg |
| Security class | S1 |
| Limit of protected value – home | to 5.000 € |
| Limit of protected value – company | to 2.500 € |
| Size of the safe | Small |
| Article number | HTS 115-01 |
| Key hooks | 50 |
| Adjustable hook slats | no |
| Door opening direction | right side |
| Door thickness | 57 mm |
| Door opening angle | 180° |
| Door clearance dimensions | 288 x 288 mm |
| Protruding door hinges/fittings | 12 mm |
| Lacquer/Colour | light grey RAL 7035 |
| Lock | VdS class I key lock (2 keys) |
| Features of the lock | 3-sided bolt locking system; in addition, fixed pins to protect the hinge area |
| More data on the body | single-walled, 3 mm thick, wrap around fire safety strip |
| More data on the door | double-walled, 6 mm thick plate |
| Adapted for anchoring in the ground | yes |
| Adapted for wall anchoring | yes |
| Equipment | - pre-installed for up to 50 hooks (additional equipment), - hooks available in lengths of 20, 30 and 40 mm depending on the size and width of the keys and bunches, - key list holder |