


HTIV 445-05

Safe for valuables

**Przepraszam,
muszę się
sfotografować.**

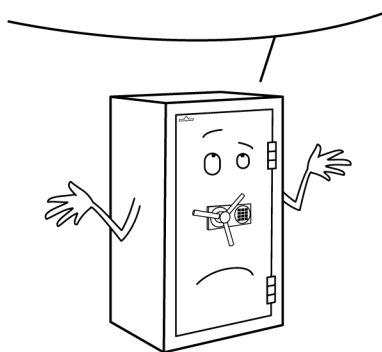

Prime parameters

Size of the safe

External dimensions: 1525 mm × 846 mm × 548 mm

Resistance class and insurance

Security class IV according to EN 1143-1

Colour

Choose your safe's standard colour or modify it

Key lock

Key lock

Technical details

| | |
|-------------------------------------|--|
| External dimensions (H x W x D) | 1525 mm x 846 mm x 548 mm |
| Internal dimensions (H x W x D) | 1425 mm x 740 mm x 350 mm |
| Weight | 765 kg |
| Capacity | 369 l |
| Security class | IV |
| Limit of protected value – home | to 400.000 € |
| Limit of protected value – company | to 150.000 € |
| Standard lock | Key lock |
| Size of the safe | Big |
| Article number | HTIV 445-05 |
| Adjustable shelves | 1 |
| Anti-burglary protection standard | EN 1143-1 |
| Fire resistance | IBS-tested fire and smoke protection through Thermodur seals in the door leaf |
| Certification body | VdS |
| Door opening angle | 90° |
| Door opening direction | right side |
| Door clearance dimensions | 1340 x 660 mm |
| Protruding door hinges/fittings | 60 mm |
| Lacquer/Colour | light grey RAL 7035 |
| Lock | high security key lock (2 keys included) + mechanical combination lock |
| Features of the lock | 3-sided bolt locking system with strong pins of 50 mm diameter |
| More data on the body | - lighter weight due to armouring: shell made of Siemens-Martin steel, filled with Hartsinter stones and bicomponent material, - Hartsinter hardness grade 9, melting point 2000 °C, - Nervoform protection system in the event of heat exposure, - protection against bursting and cutting with a torch |
| Adapted for anchoring in the ground | yes |
| Adapted for wall anchoring | no |
| Equipment | preparation for connection of an alarm system |